

# DESCATUBE 22P1

0,50 mm - 12 mm

Polyester sleeves heat resistant + 130°C, classe B

## Application

Internal wiring of rotating and static machines in classes B and of hermetically closed units, sleeves for cable harnessing (automotive industry, electronics, light fittings), etc.


## Construction

Braided polyester sleeves, slightly impregnated  
Colour white

## Special Characteristics

Excellent mechanical resistance, high resistance to oils, alcohols and solvents, high resistance to freon gas, compatible with most impregnation varnishes.

Part Number	Inner Ø mm	Tolerance +/- mm	Wall thickness min. mm	Weight kg/km
806220	0,50	0.25	0.20	1.40
806222	0,80	0.25	0.20	1.70
806224	1,00	0.25	0.20	1.80
806226	1,50	0.25	0.20	2.00
806228	2,00	0.25	0.20	2.60
806230	2,50	0.25	0.20	3.00
806232	3,00	0.50	0.20	3.50
806234	3,50	0.50	0.20	3.80
806236	4,00	0.50	0.30	4.20

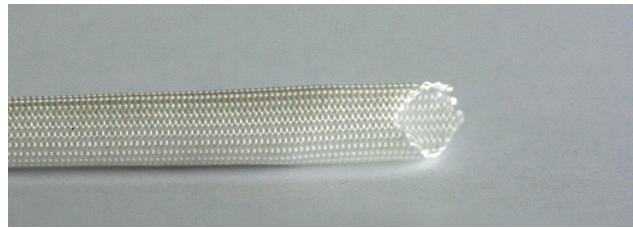

## Technical Properties

Dielectric strength (in dry) 800 - 1200 V  
Temperature range + 130°C

## Standards / Approvals

IEC 60684-1, IEC-60684-2, IEC 60684-3 part 320

Part Number	Inner Ø mm	Tolerance +/- mm	Wall thickness min. mm	Weight kg/km
806238	4,50	0.50	0.30	7.50
806240	5,00	0.50	0.30	8.00
806242	6,00	0.50	0.30	10.00
806244	7,00	0.50	0.30	12.00
806246	8,00	0.50	0.30	15.30
806248	9,00	0.50	0.30	18.00
806250	10,00	0.50	0.40	20.00
806252	12,00	1.00	0.40	24.00

## On request

Up to Inner-Ø 25 mm possible

## Packaging

0,50 - 4.50 mm coils of 200 m, 5 - 8 mm coils of 100 m, 9 - 12 coils of 50 m