


DESCAFLEX Flat

0,14 mm²

Cables PVC 80°C 200 V, flat oval

Application

Flexible electric cables for computer peripheral equipment etc..

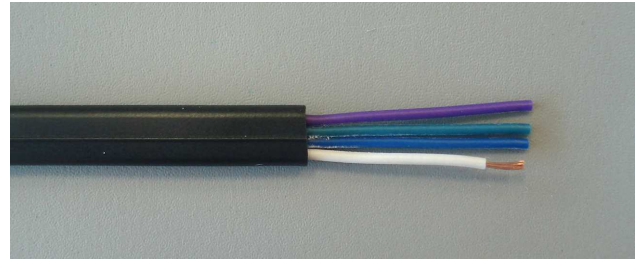

Construction

Flexible bare copper conductors, extra flexible 36x0.07 mm
Insulation PP (Polypropylene), diameter nom. 0,90 mm
Conductors in parallel, colours:
4p white, blue, turquoise, violet
6p white, blue, turquoise, violet, black, orange
8p white, brown, green, yellow, grey, pink, blue, red
Sheath PVC black anthracite (RAL 7021), flat oval

Technical Properties

Rated voltage max. 200 V
Test voltage 2'000 V
Insulation resistance $\geq 20 \text{ MOhm} \times \text{km}$
Temperature range - 25°C ... + 80°C

Part Number	Type n x mm ²	Overall-Ø ca. mm	Copper kg/km	Weight kg/km
213420	4 x 0.14	2.30 x 4.80	5.20	20.00
213421	6 x 0.14	2.30 x 6.60	8.40	28.00

Part Number	Type n x mm ²	Overall-Ø ca. mm	Copper kg/km	Weight kg/km
213422	8 x 0.14	2.30 x 8.30	11.20	36.00

Packaging

cut to desired length