

DESCATUBE 21F2 and 21F3

0,50 mm - 20 mm

Fibreglass sleeves heat resistant + 280°C

Application

Sleeves for cable harnessing subjected to high temperature and mechanical stress, for wiring of electrical heating appliances and domestic electrical appliances, cooking appliances, ovens, convectors, light fittings, etc.

Construction

21F2


double fibreglass braid sleeves, impregnated with a special varnish
Solvent-free
Colour black

21F3

triple fibreglass braid sleeves, impregnated with a special varnish
Solvent-free
Colour black

Special Characteristics

Good mechanical resistance, high abrasion resistant, UV resistant and self-extinguishing.

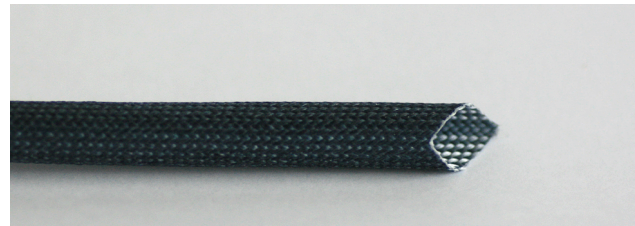

Technical Properties

Dielectric strength (in dry)
- 21F2 1500 - 1800 V
- 21F3 2000 - 2200 V
Temperature range - 30°C ... + 280°C

Standards / Approvals

IEC 60684-1, IEC-60684-2
Approval (flame test) according to cULus 1441 / CSA 22.2

DESCATUBE 21F2

Part Number	Inner Ø mm	Tolerance +/- mm	Wall thickness min. mm	Weight kg/km
806132	0,50	*	*	*
806134	0,80	*	*	*
806136	1,00	*	*	*
806138	1,50	*	*	*
806140	2,00	*	*	*
806142	2,50	*	*	*
806144	3,00	*	*	*
806146	3,50	*	*	*
806148	4,00	*	*	*
806150	4,50	*	*	*
806152	5,00	*	*	*
806154	6,00	*	*	*
806156	7,00	*	*	*
806158	8,00	*	*	*
806160	9,00	*	*	*
806162	10,00	*	*	*
806164	12,00	*	*	*
806166	14,00	*	*	*
806168	16,00	*	*	*
806170	18,00	*	*	*
806172	20,00	*	*	*

DESCATBUE 21F3

Part Number	Inner Ø mm	Tolerance +/- mm	Wall thickness min. mm	Weight kg/km
806176	0,50	*	*	*
806178	0,80	*	*	*
806180	1,00	*	*	*
806182	1,50	*	*	*
806184	2,00	*	*	*
806186	2,50	*	*	*
806188	3,00	*	*	*
806190	3,50	*	*	*
806192	4,00	*	*	*
806194	4,50	*	*	*
806196	5,00	*	*	*
806198	6,00	*	*	*
806200	7,00	*	*	*
806202	8,00	*	*	*
806204	9,00	*	*	*
806206	10,00	*	*	*
806208	12,00	*	*	*
806210	14,00	*	*	*
806212	16,00	*	*	*
806214	18,00	*	*	*
806216	20,00	*	*	*

* on request

Packaging

0,50 - 4.50 mm coils of 200 m, 5 - 12 mm coils of 100 m, 14 - 20 coils of 50 m, 22 - 50 mm coils of 25 m